


BIG.009 Q

Frameless XXL Luminaire
Indoor // square

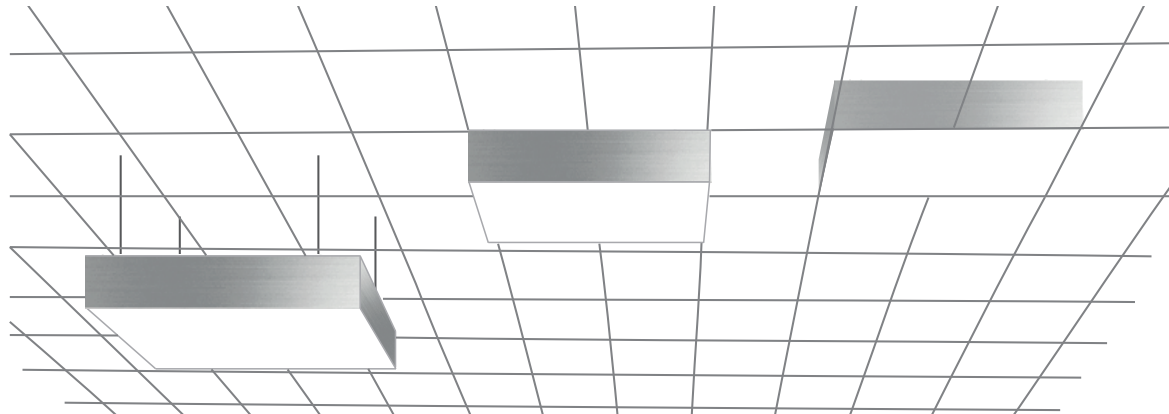

PENDULAR LUMINAIRE (PL)

SURFACE-MOUNTED LUMINAIRE (AB)

RECESSED LUMINAIRE (EB)

PRODUCT DESCRIPTION

Aluminum-frame, powder coated to RAL for receiving a clamping membrane. Frame closed or equipped with recesses for lateral light exit (form upon request). Indirect lighting component possible. Supplied ready for connection to a side length of two meters. Larger luminaires are supplied in several sections for an on-site finishing process. Gear plate is accommodated with bored holes for ceiling mounting.

CLAMPING-MEMBRANE

Fire safe class DIN EN 13501-1 / B-s1-d0, either white / unprinted or following the sample of digital print, assembled with silicone anchor system for fixation in the aluminum profile. Tool-less removal for service maintenance (sewn loop). Optional acoustic version available.

TECHNICAL DATA

Material: Aluminum
Color: Powder coated
Usage: Indoor
Aiming: Fixed

Formats: 1000 - 3000 mm
Height: 250 mm
Voltage: 220-240 V
Illumination: T5 luminaires with EB's or LED, dimmable

FORMAT SPECIFIC DATA

Formats	Rated power				Weight	Pendular Luminaire	Surface-mounted Luminaire	Recessed Luminaire
	Fluorescent lamp	Total luminous flux white (typ.)	LED	Total luminous flux white (typ.)		Wire suspensions	Fixing points	Mounting brackets
Q 1000 x 1000	160 W	4.450 lm	100 W	3.220 lm	20 kg	4 pcs.	4 pcs.	4 pcs.
Q 1500 x 1500	300 W	9.450 lm	220 W	7.450 lm	36 kg	4 pcs.	4 pcs.	4 pcs.
Q 2000 x 2000	750 W	24.300 lm	270 W	12.900 lm	58 kg	6 pcs.	6 pcs.	8 pcs.
Q 2500 x 2500	1030 W	44.550 lm	410 W	20.300 lm	80 kg	8 pcs.	8 pcs.	12 pcs.
Q 3000 x 3000	1180 W	50.920 lm	590 W	29.210 lm	105 kg	8 pcs.	8 pcs.	12 pcs.

IP20