


# BIG.009 R

Frameless XXL Luminaire  
Indoor // round

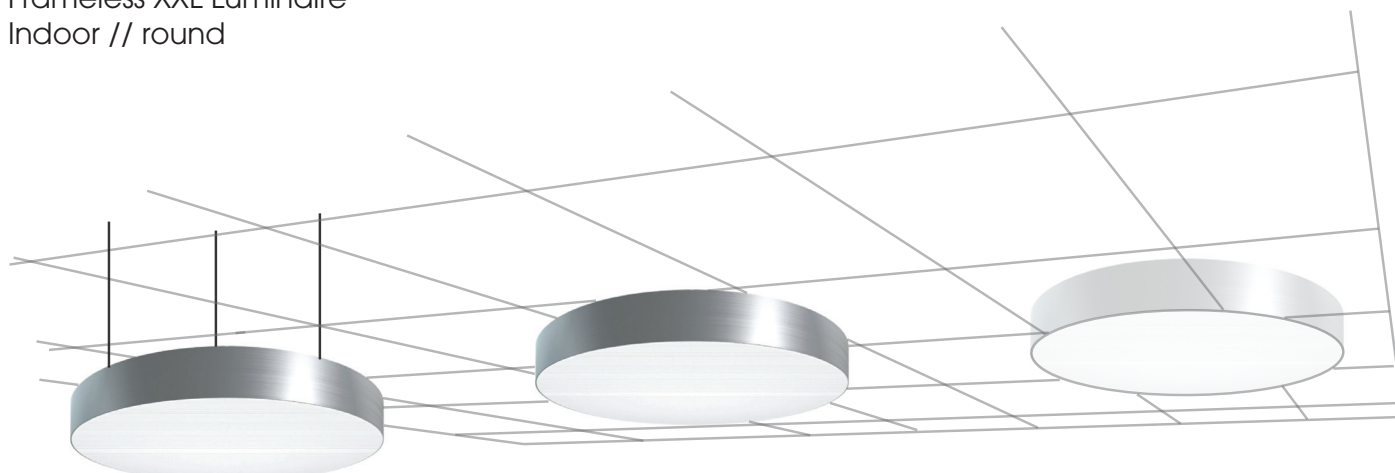

PENDULAR LUMINAIRE (PL)

SURFACE-MOUNTED LUMINAIRE (AB)

BUILT-IN LUMINAIRE (EB)

## PRODUCT DESCRIPTION

Aluminum-frame, powder coated to RAL for receiving a clamping membrane. Frame closed or equipped with recesses for lateral light exit (form upon request). Indirect lighting component possible. Supplied ready for connection to a diameter of two meters. Larger luminaires are supplied in several sections for an on-site finishing process. Gear plate is accommodated with bored holes for ceiling mounting.

## CLAMPING-MEMBRANE

Fire safe class DIN EN 13501-1 / B-s1-d0, either white / unprinted or following the sample of digital print, assembled with silicone anchor system for fixation in the aluminum profile. Tool-less removal for service maintenance (sewn loop). Optional acoustic version available.

## TECHNICAL DATA

Material:	Aluminum	Diameter:	1000 - 3000 mm
Color:	Powder coated	Height:	250 mm
Usage:	Indoor	Voltage:	220-240 V
Aiming:	Fixed	Illumination:	T5 luminaires with EB's or LED, dimmable

## DIAMETER SPECIFIC DATA

Diameter	Rated power				Weight	Pendular Luminaire	Surface-mounted Luminaire	Built-in Luminaire
	Fluorescent lamp	Total luminous flux white (typ.)	LED	Total luminous flux white (typ.)		Wire suspensions	Fixing points	Mounting brackets
R 1000	130 W	3.350 lm	90 W	3.015 lm	16,5 kg	3 pcs.	3 pcs.	4 pcs.
R 1500	350 W	7.650 lm	180 W	6.030 lm	29 kg	4 pcs.	4 pcs.	4 pcs.
R 2000	525 W	21.500 lm	280 W	14.500 lm	45 kg	6 pcs.	6 pcs.	6 pcs.
R 2500	820 W	34.470 lm	430 W	25.300 lm	62 kg	8 pcs.	8 pcs.	8 pcs.
R 3000	1090 W	45.900 lm	620 W	38.200 lm	82 kg	8 pcs.	8 pcs.	8 pcs.

IP20