


# BIG.014 R

Organic XXL Luminaire  
Indoor // round

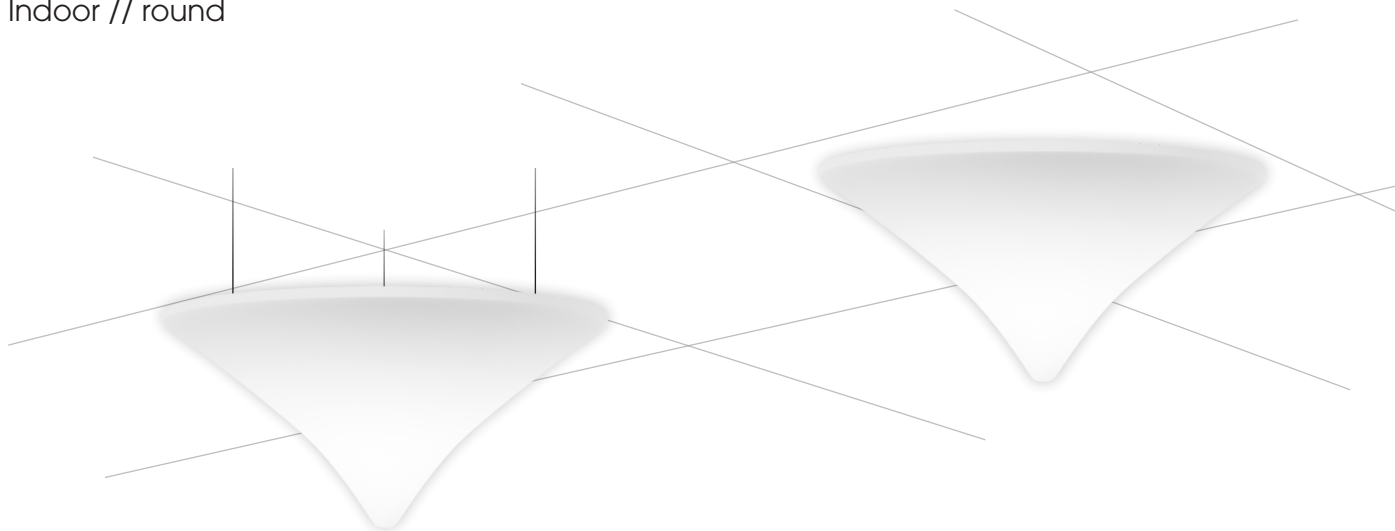

PENDULAR LUMINAIRE (PL)

SURFACE-MOUNTED LUMINAIRE (AB)

## PRODUCT DESCRIPTION

Aluminum-frame, powder coated white for receiving a clamping membrane. Indirect lighting component possible. Supplied ready for connection to a diameter of two meters. Larger luminaires are supplied in several sections for an on-site finishing process. Gear plate is accommodated with bored holes for ceiling mounting.

## CLAMPING-MEMBRANE

Fire safe class DIN EN 13501-1 / B-s1-d0, white unprinted, assembled with silicone anchor system for fixation in the aluminum profile. Tool-less removal for service maintenance.

## TECHNICAL DATA

Material:	Aluminum	Diameter:	1000 - 3000 mm
Color:	Powder coated / white	Height:	Variable
Usage:	Indoor	Voltage:	100-240 V
Aiming:	Flexible	Illumination:	LED

## DIAMETER SPECIFIC DATA

Diameter	Rated power			Pendular Luminaire	Surface-mounted Luminaire
	LED	Total luminous flux white (typ.)	Weight	Wire suspensions	Fixing points
R 1000	140 W	9.600 lm	6,5 kg	3 pcs.	3 pcs.
R 1500	180 W	12.800 lm	13 kg	4 pcs.	4 pcs.
R 2000	230 W	16.000 lm	22 kg	6 pcs.	6 pcs.
R 2500	270 W	19.200 lm	34 kg	8 pcs.	8 pcs.
R 3000	360 W	25.600 lm	48 kg	8 pcs.	8 pcs.

IP20